


RK 150L - 760 m³/h

TECHNICAL DATASHEET

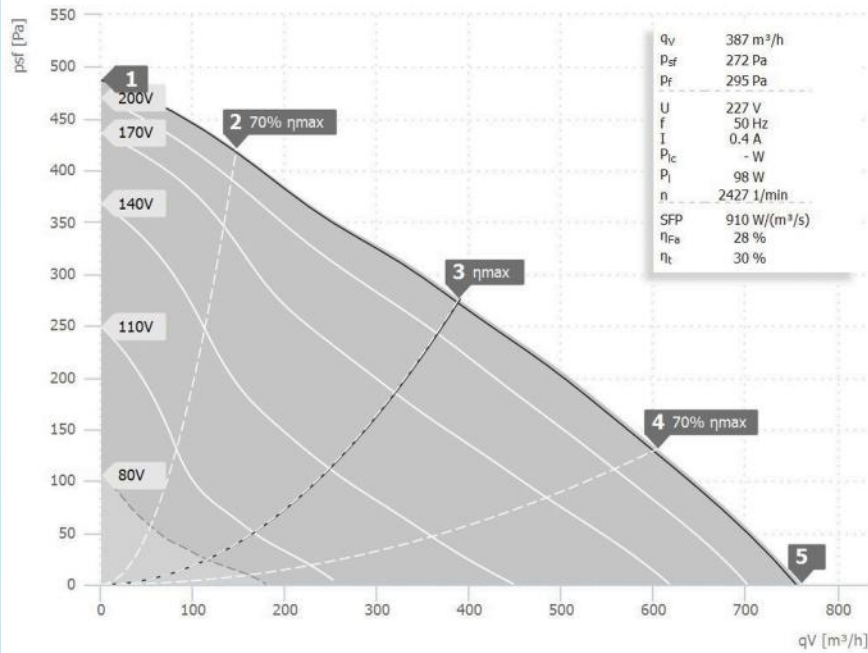

- Backward curved centrifugal fan
- Plastic housing PA6, RAL 7035
- Speed controllable
- Integrated thermostatic switch
- Incl. terminal box

Operating Point		1	2	3	4	5
Current I	A	0,4	0,4	0,4	0,4	0,4
Power Consumption P _l	W	75	82	99	103	99
RPM n	1/min	2730	2635	2442	2395	2452
SPL inlet L _{WA5}	dB(A)	72	71	71	72	74
SPL outlet L _{WA6}	dB(A)	69	69	67	68	70
SPL casing break out L _{WA2}	dB(A)	60	60	59	59	61

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	70	38	48	60	63	67	62	58	50
Outlet	L _{WA6}	67	37	53	60	56	62	62	57	48
Casing	L _{WA2}	59	34	40	52	52	54	50	41	32

RK 150L 104510	
Voltage U _N	230 V 1~
Current I _{max}	0,5
Ambient Temperature t _A	55 °C
Medium temperatures t _M	55 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	3,2 kg

