




MAX-FAN PRO SERIES 400 - 3300 m³/h

TECHNICAL DATASHEET

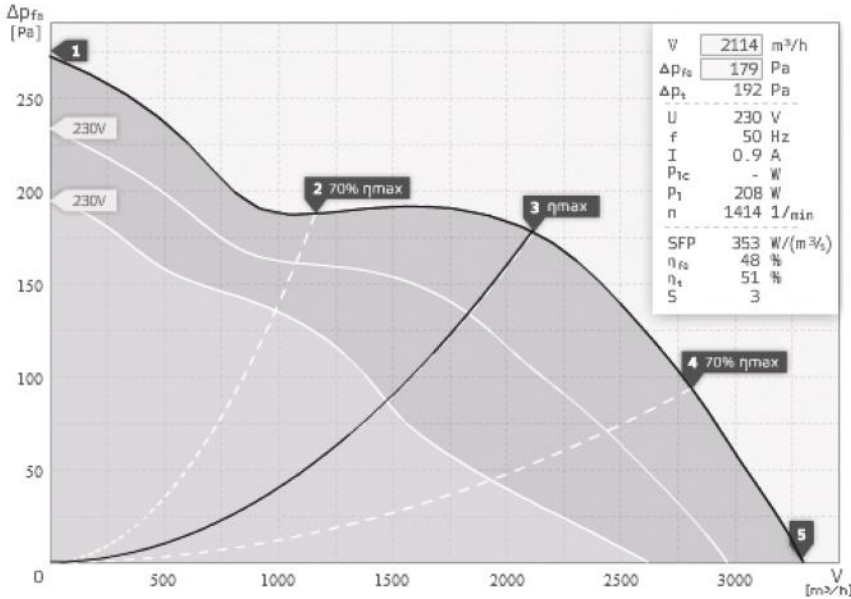

- Diagonal impeller with stator
- With Plastic housing
- With 2-step switch
- Integrated thermal switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	0,8	0,8	0,9	0,9	0,9
Power Consumption P1	W	177	174	208	205	188
RPM n	1/min	1436	1438	1414	1416	1426
SPL inlet LWA5	dB(A)	74	70	71	70	72
SPL outlet LWA6	dB(A)	78	74	75	73	75
SPL casing break out LWA2	dB(A)	59	57	57	53	54

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	71	52	58	64	67	66	62	54	48
Outlet	LWA6	75	51	58	66	71	71	63	56	50
Casing	LWA2	57	51	44	44	51	52	47	32	26

EM 400 E4S 01 129164	
Voltage UN	230 V 1~
Current Imax	1
Ambient Temperature tA	60 °C
Medium Temperature tM	60 °C
Speed Control	3-2-1
Motor Protection	TAI
Isolation Class	F
Weight	15,7 kg

